

0010 Daybed Trundle Assembly Instructions






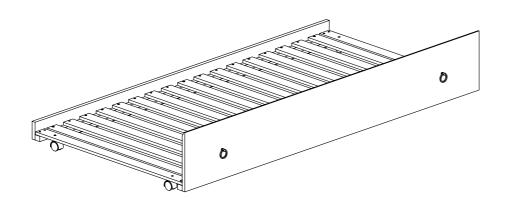





Note: Do not assemble using power tools. This can cause the bolts to be overtightened

Parts List

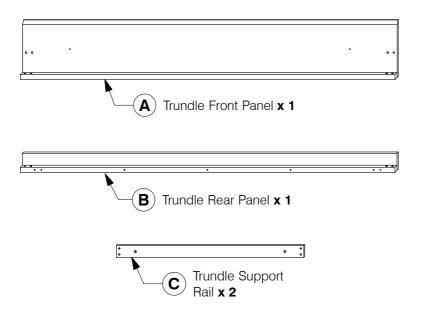

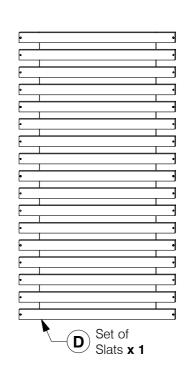

3 Hardware List



5) Allen Key

x 1



(2) M6 x 15mm JCB x 4



6) Handle x 2



Wood Screw (M4 x 32mm) x 24




Metal Bracket x 2



Wood Screw (M4 x 22mm) x 2



8) Wheels x 4

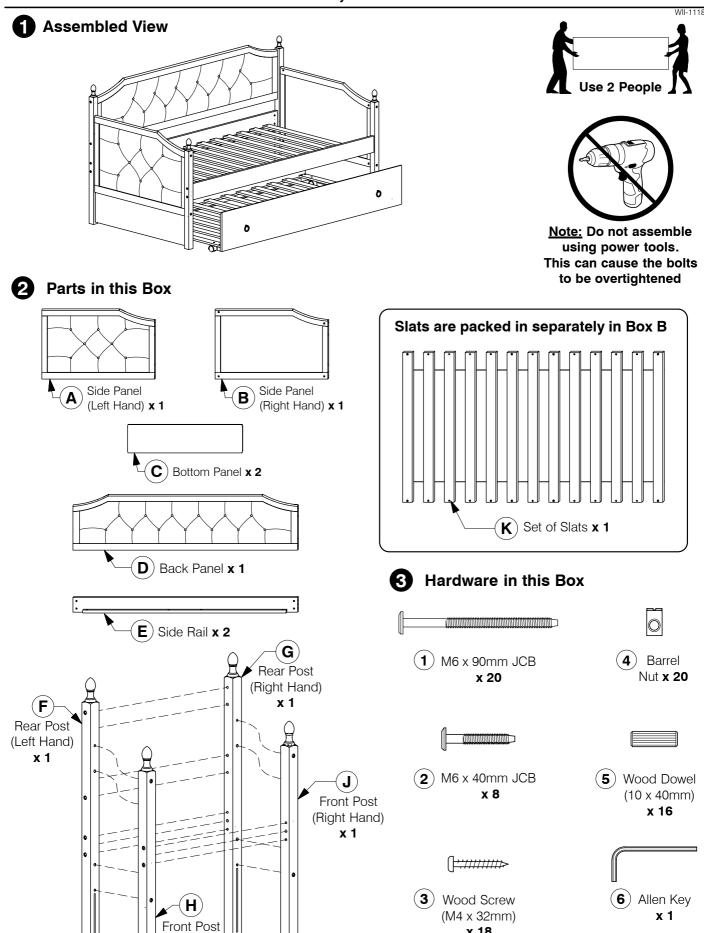


(Left Hand) x 1


x 18


Page 1 of 4


4 Assemble the Rear Post (F/G) to the Side Panel (A/B).

5 Slide the Bottom Panel (C) into the groove on the Side Panel (A/B) & Rear Post (F/G).

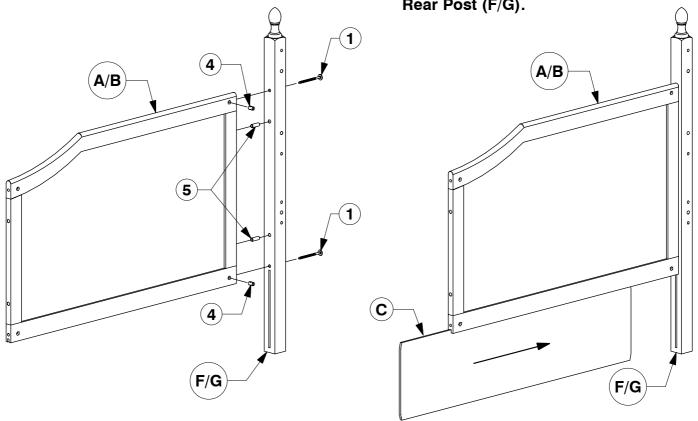


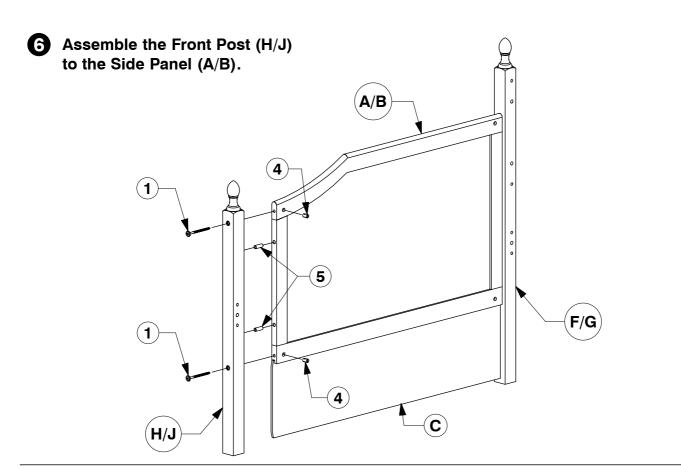

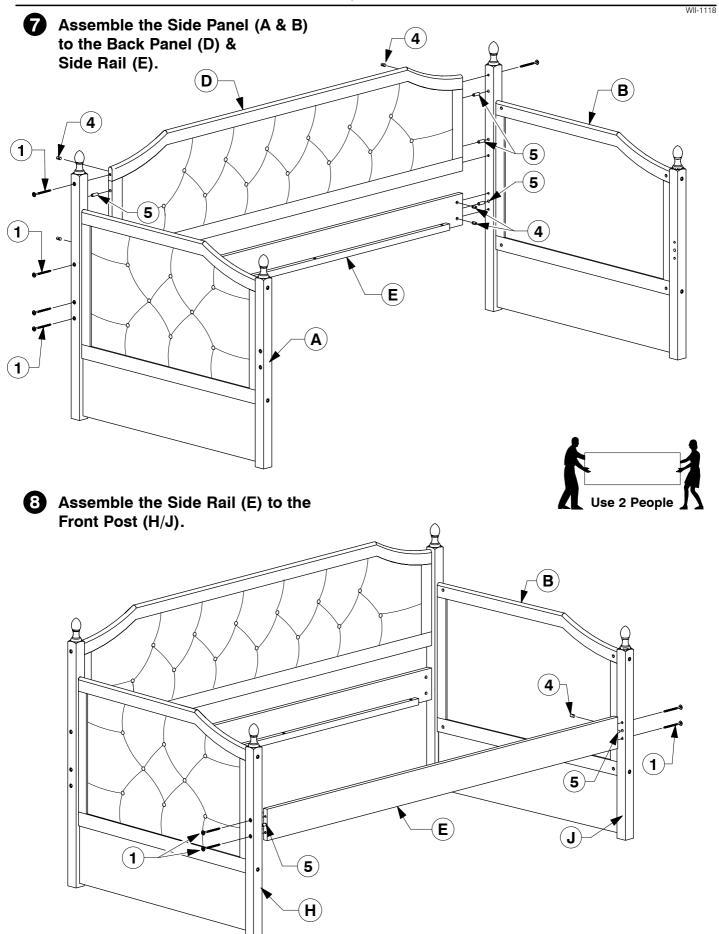

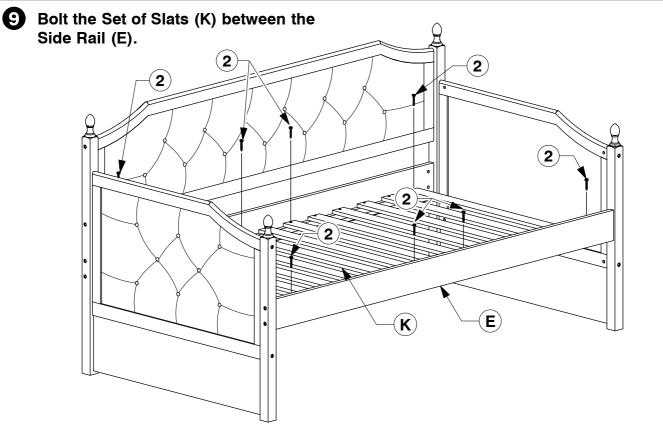

Screw the Set of Slats (K) between the Side Rail (E). Finally, fit the assembled Trundle.

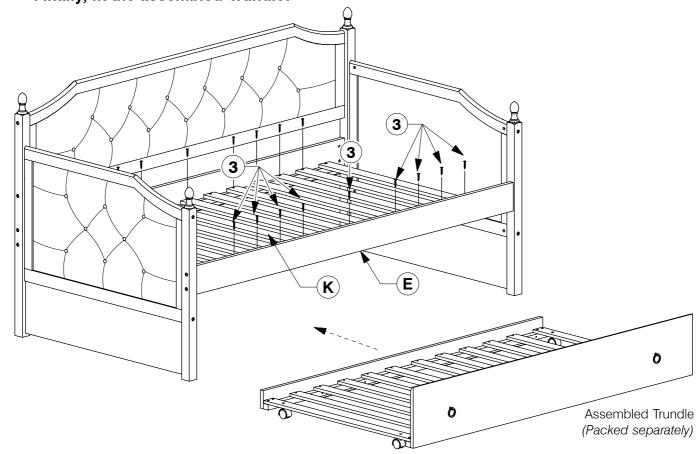

0010 Daybed Trundle
Assembly Instructions 4 Fit the Wheels (8) to the Trundle Support Rail (C). 8 1 (C **5** Assemble the Set of Slats (D) & Trundle Support Rail (C) to the Trundle Front Panel (A) & Trundle Rear Panel (B). D D 3 3 \bigcirc 3 C 3 6 Fit the Handle (6) to the **Trundle Front Panel (A).**

