




this ITEM contains:

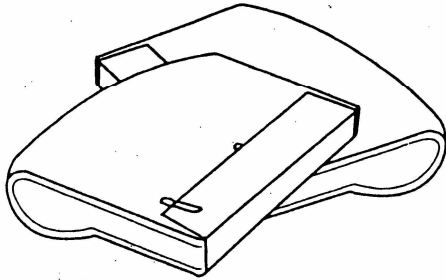


(2) Arms




(1) Seat Base



(1) Back (if loose pillow back, 2)

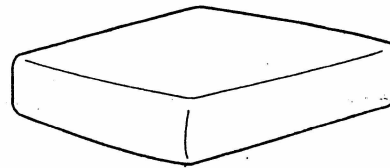

(1) Seat Cushion



(4) Legs




(6) Assembly knobs / EXTRA 6 BOLTS w/O KNOB FOR PARTS




club chair assembly


1. Layout and familiarize yourself with the parts. Start with the seat box. Separate the quilted liner from the hook-and-loop strip underneath to expose the inside of the seat box.

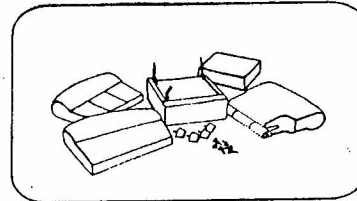


2. Choose either a right or left arm. Orient it so that it is upright and align the pre-drilled holes in the arm with the pre-drilled holes in the seat box. There are alignment pegs to help with this action. Insert the wooden alignment pegs (2) in the slots marked with a "D" on the seat box. Arrange the arm so that the alignment pegs find the corresponding hole slots in the arm. This automatically lines up the pre-drilled holes. Insert the three-pronged knobs and tighten down, although not completely.




3. Repeat step with the other arm. Once the arms are aligned, tighten down all screws.




4. Tilt the chair back so that it is resting on its back. Locate the pre-drilled holes in the bottom of the chair and screw on the legs. Reattach the quilted liner, pressing firmly along the hook-and-loop strip. Carefully return the chair to its upright position.




5. Hold the back level, align the sleeves to the reclining mechanism arms and slowly lower the back so that it slides down the arms until it stops. Make sure the back is seated level. Press down on the back until you hear a "click," which means the back has seated fully on the reclining mechanism.* You may need to rap on the top of the back with the palm of your hand. DO NOT USE A HAMMER. If you do not hear a click but the back is level and locked in place, you have installed it correctly.



6. Insert the seat cushion. Aggressively fluff the back cushion to restore it to its original shape. Have a seat. You're done.



PRESSBACK OPERATION: Locate the handle between the seat cushion and the right arm. Pull the handle back to recline. To return the back to upright, pull the handle back while leaning forward.



***IMPORTANT:** Once the back is seated onto the base, clips secure it to the sleeves and removing the back then becomes challenging. We recommend leaving the back secured to the base after it has been attached.