


---


# ASSEMBLY INSTRUCTIONS

## PARTS AND HARDWARE

Avoid using sharp objects such as knife to cut open packing as you may accidentally damage the upholstery.




A. Seat (Loveseat)  
1x



B. Backrest (Loveseat)  
1x



C. Armrest/Legs  
6x




D. Seat (single Seater)  
2x



E. Backrest (Single Seater)  
2x



F. Front/Back Panel (Coffee Table)  
2x



G. Side Panel/Legs (Coffee Table)  
2x



H. Table glass  
1x



H. Bolts / Washers  
46x



H. Allen Key  
1x


Some joint parts on our hand made rattan furniture might be shifted slightly during transportation. If you encounter problems like unbalanced chairs after assembling, please contact our customer service or try to hit it lightly against the floor a few times. Please refer to the video link below for your reference:  
<https://1drv.ms/v/s!AsP2P9ym9PwAgV9G4i-zpAwaHGMT>

## ASSEMBLY INSTRUCTIONS (Coffee Table)


1. Take the feet (H).




2. A fixing game by screws(H), assemble the pieces(F) on each side of the feet(G). Do not screw the screws completely.



3. A fixing game by screws(H), assemble the another feet(G) on the table as shown in Figure 3.




4. Tighten all screws completely.

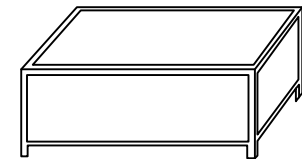


 x 8 Used

ASSEMBLY INSTRUCTIONS(Loveseat)


5. Locate seat (Loveseat)(A).

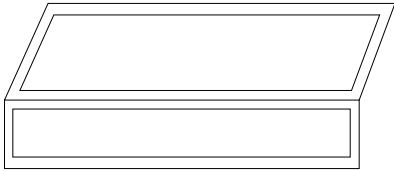


6. Affix washers to bolts(I), assemble legs/arms(C) on each side of the loveseat(A). Do not fully tighten bolts.

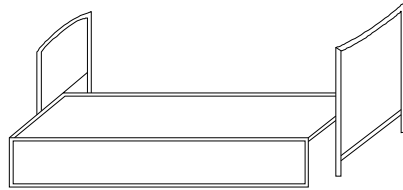

7. Affix washers to bolts(I), assemble backrest (Loveseat)(B) to the back of seat (A) as shown in figure below.

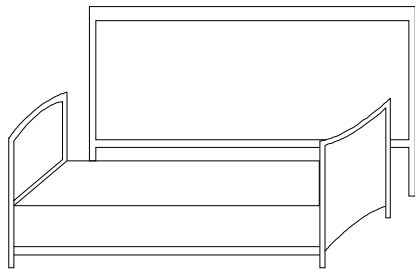


8. Tighten all bolts completely.

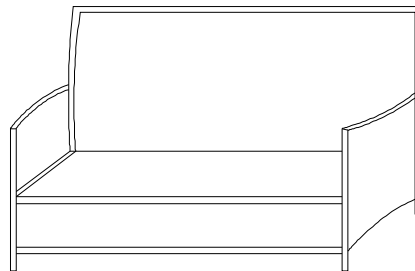


 x 14 Used

ASSEMBLY INSTRUCTIONS (Single Seater)


9. Locate seat (Single seater)(D).

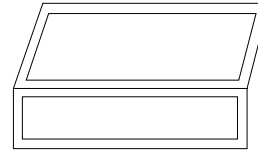


10. Affix washers to bolts(I), assemble legs/arms(C) on each side of the seat(D). Do not fully tighten bolts.




11. Affix washers to bolts(I), assemble backrest (Single Seater)(E) to the back of seat (D) as shown in figure below.

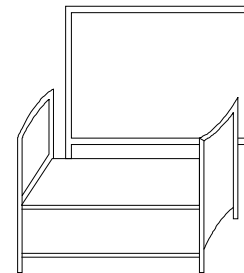

12. Tighten all bolts completely.

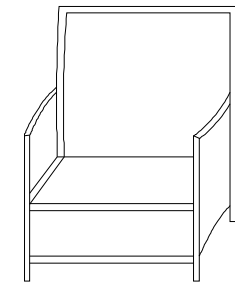

13. Repeat steps 9-12 for the second single seater.

 x 12\*2 Used